



DC AXIAL FANS



DATA SERIES 127×127×38 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 7 Blades
- * Rotational direction CCW view from front face
- * Weight: 450g (15.87 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DATA1338_2E	-FG/RD	B	12	7 to 13.2	0.55	6.6	3400	3.402	120.14	12.21	0.481	48	142500
DATA1338_2L	-FG/RD	B	12	7 to 13.2	0.65	7.8	3800	3.783	133.61	14.5	0.571	51	142500
DATA1338_2M	-FG/RD	B	12	7 to 13.2	0.83	9.96	4200	4.204	148.48	17.4	0.685	54	142500
* DATA1338_2H	-FG/RD	B	12	7 to 13.2	1.01	12.12	4600	4.613	162.91	21.5	0.846	56	142500
* DATA1338_2U	-FG/RD	B	12	7 to 13.2	1.26	15.12	5000	5.019	177.26	26	1.024	59	142500
DATA1338_2S	-FG/RD	B	12	7 to 13.2	1.59	19.08	5400	5.363	189.38	28.6	1.126	61	125000
DATA1338_2F	-FG/RD	B	12	7 to 13.2	2.08	24.96	6000	6.019	212.57	34.6	1.362	63	70000

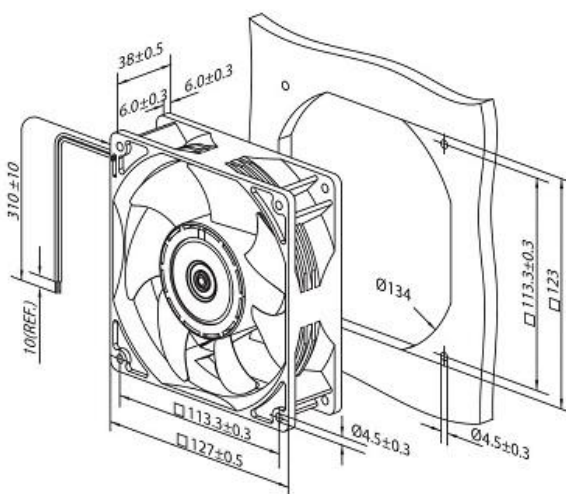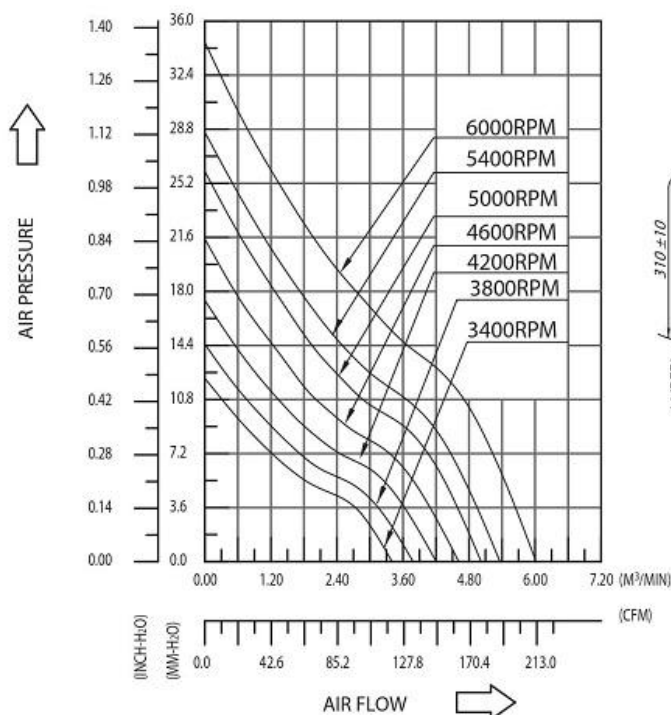

DC AXIAL FANS

DATA SERIES 127×127×38 mm 48v

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 7 Blades
- * Rotational direction CCW view from front face
- * Weight: 450g (15.87 OZ)



ASIA VITAL COMPONENTS CO., LTD. Six Sigma

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40 °C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DATA1338_8E	-FG/RD	B	48	36 to 60	0.17	8.16	3400	3.402	120.14	12.21	0.481	48	142500
DATA1338_8L	-FG/RD	B	48	36 to 60	0.20	9.6	3800	3.783	133.61	14.5	0.571	51	142500
DATA1338_8M	-FG/RD	B	48	36 to 60	0.23	11.04	4200	4.204	148.48	17.4	0.685	54	142500
* DATA1338_8H	-FG/RD	B	48	36 to 60	0.28	13.44	4600	4.613	162.91	21.5	0.846	56	142500
* DATA1338_8U	-FG/RD	B	48	36 to 60	0.33	15.84	5000	5.019	177.26	26	1.024	59	142500
DATA1338_8S	-FG/RD	B	48	36 to 60	0.39	18.72	5400	5.363	189.38	28.6	1.126	61	125000
DATA1338_8F	-FG/RD	B	48	36 to 60	0.52	24.96	6000	6.019	212.57	34.6	1.362	63	70000

